


DMX CONNECTION LEGEND


DMX Signal	Pin
SHLD/COM	1
D1-	2
D1+	3
D2- N/C	4
D2+ N/C	5

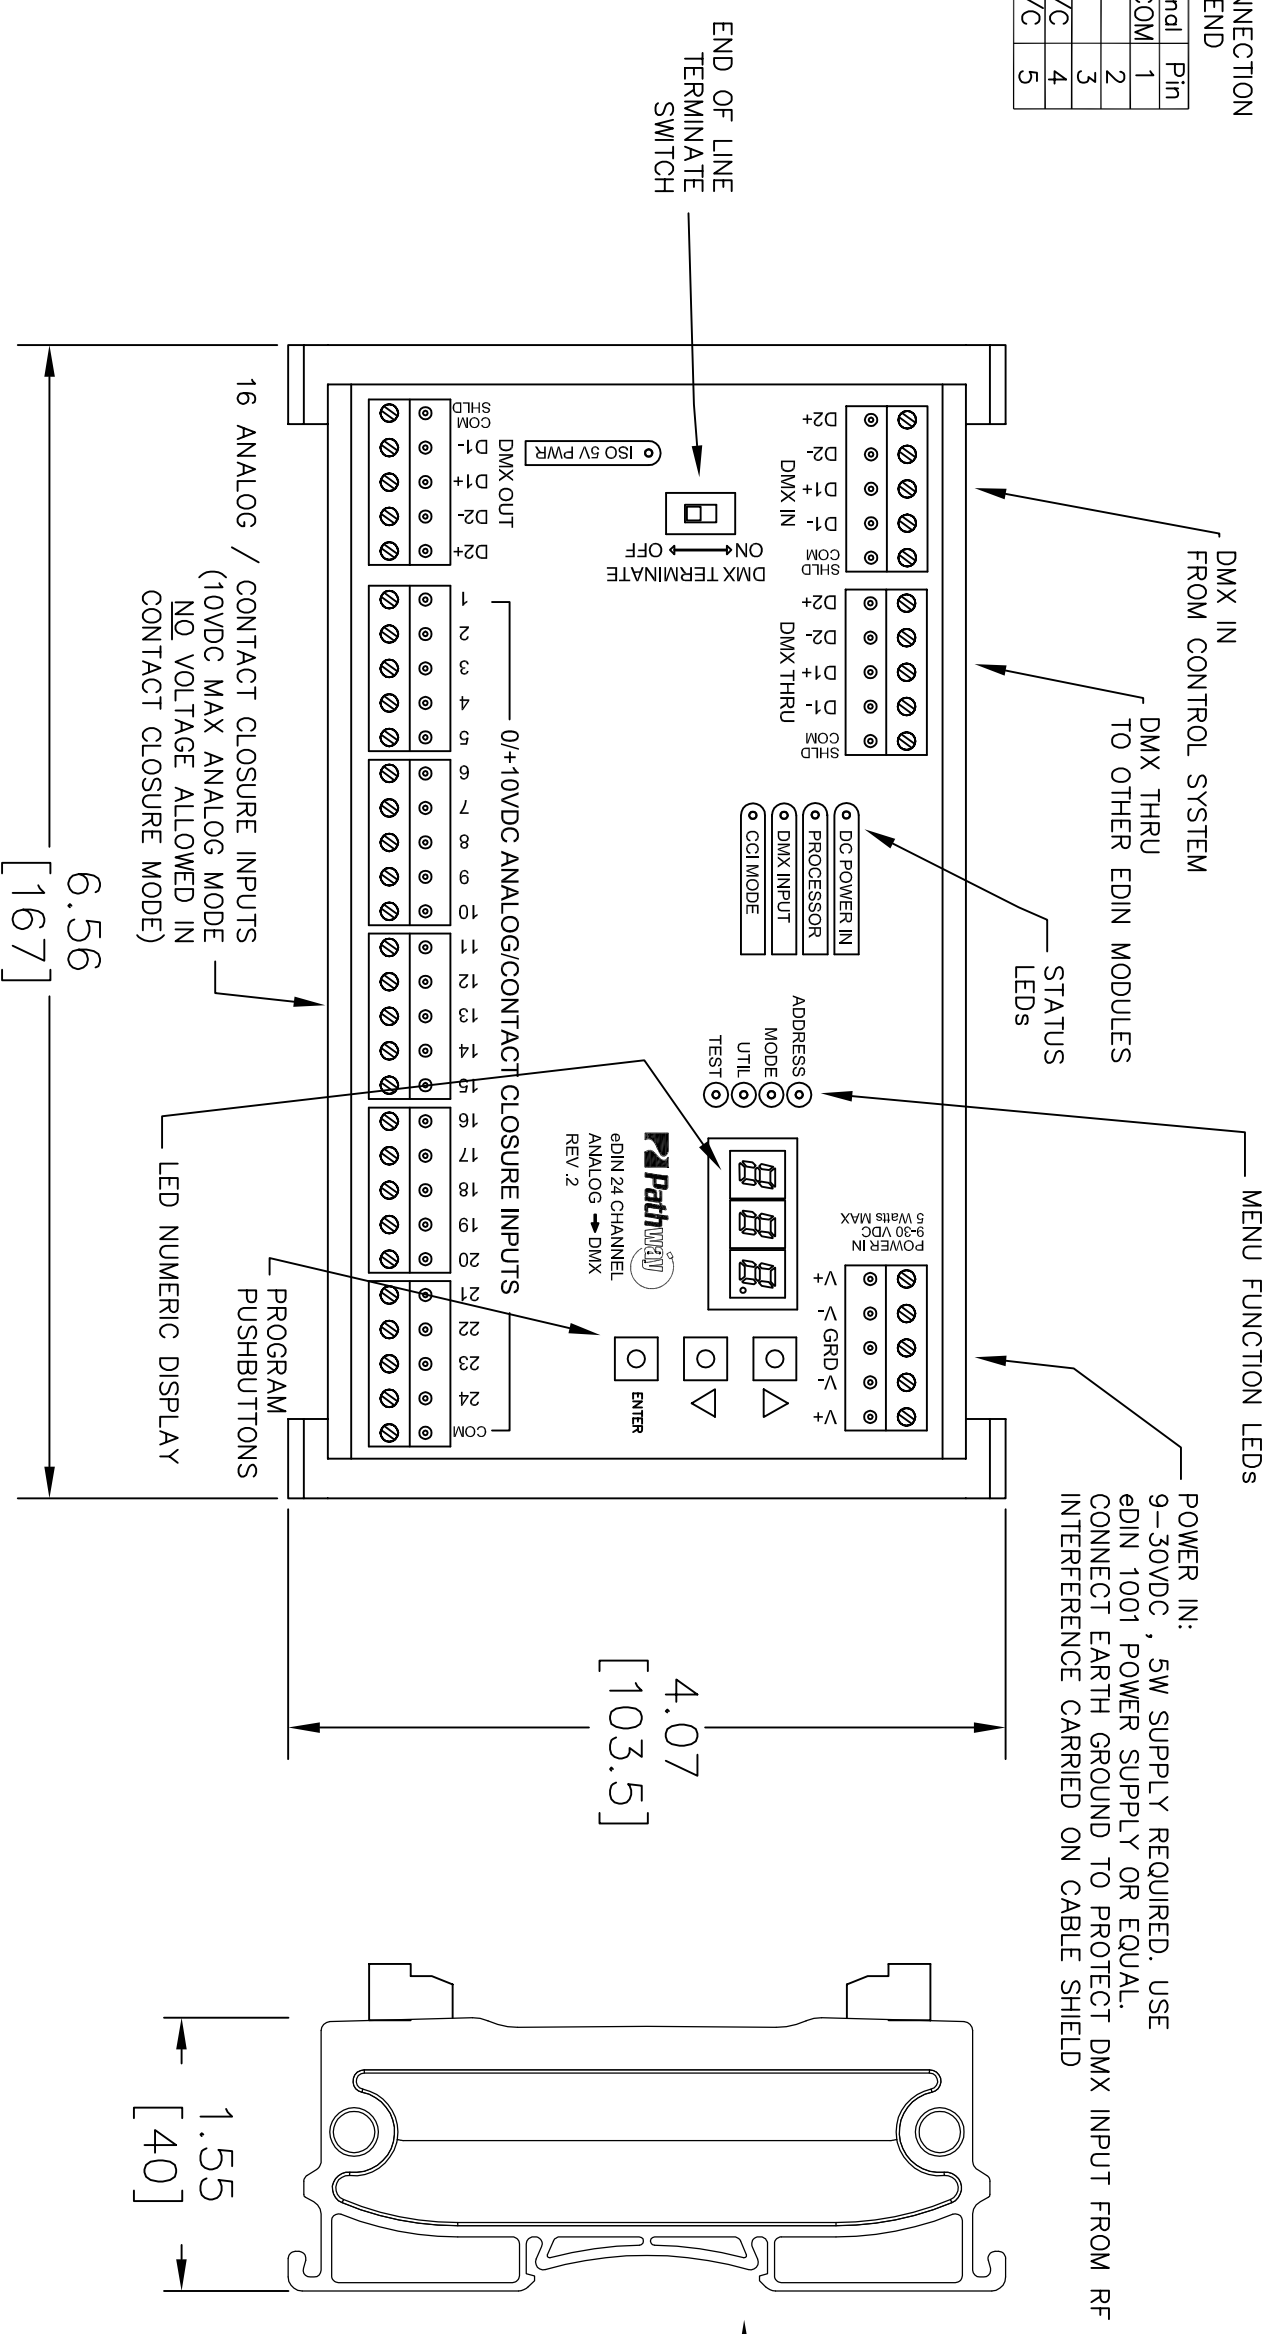

POWER IN:
 9-30VDC , 5W SUPPLY REQUIRED. USE
 eDIN 1001 POWER SUPPLY OR EQUAL.
 CONNECT EARTH GROUND TO PROTECT DMX INPUT FROM RF
 INTERFERENCE CARRIED ON CABLE SHIELD

Fastening mechanism designed
 for 35 x 7.5mm DIN rail

1006 - eDIN 24 CH ANALOG-DMX REV2
 PART NUMBER: 1006
 FILENAME: 1006 eDIN 24CH ANALOG-DMX REV2.dwg

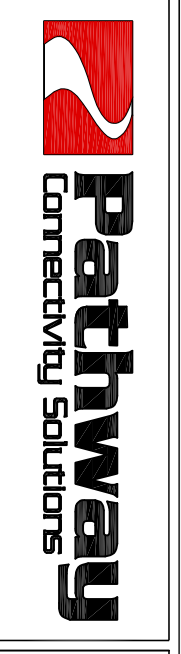

Pathway Connectivity
 103 Inglewood Plaza, 1439 17th Avenue SE
 Calgary, Alberta, Canada T2G 1J9
 Phone: +1(403)243-8110 Fax: +1(403)287-1281
<http://www.pathwayconnect.com>

DRAWN BY: BRIAN F. EVANS
 DATE: 11/20/2015
 CHECKED: ROBERT ARMSTRONG
 SCALE: NTS
 UNITS: INCHES [mm]

REV
B