


DMX Signal	Pin
SHLD/COM	1
D1-	2
D1+	3
D2- N/C	4
D2+ N/C	5

DMX CONNECTION
LEGEND

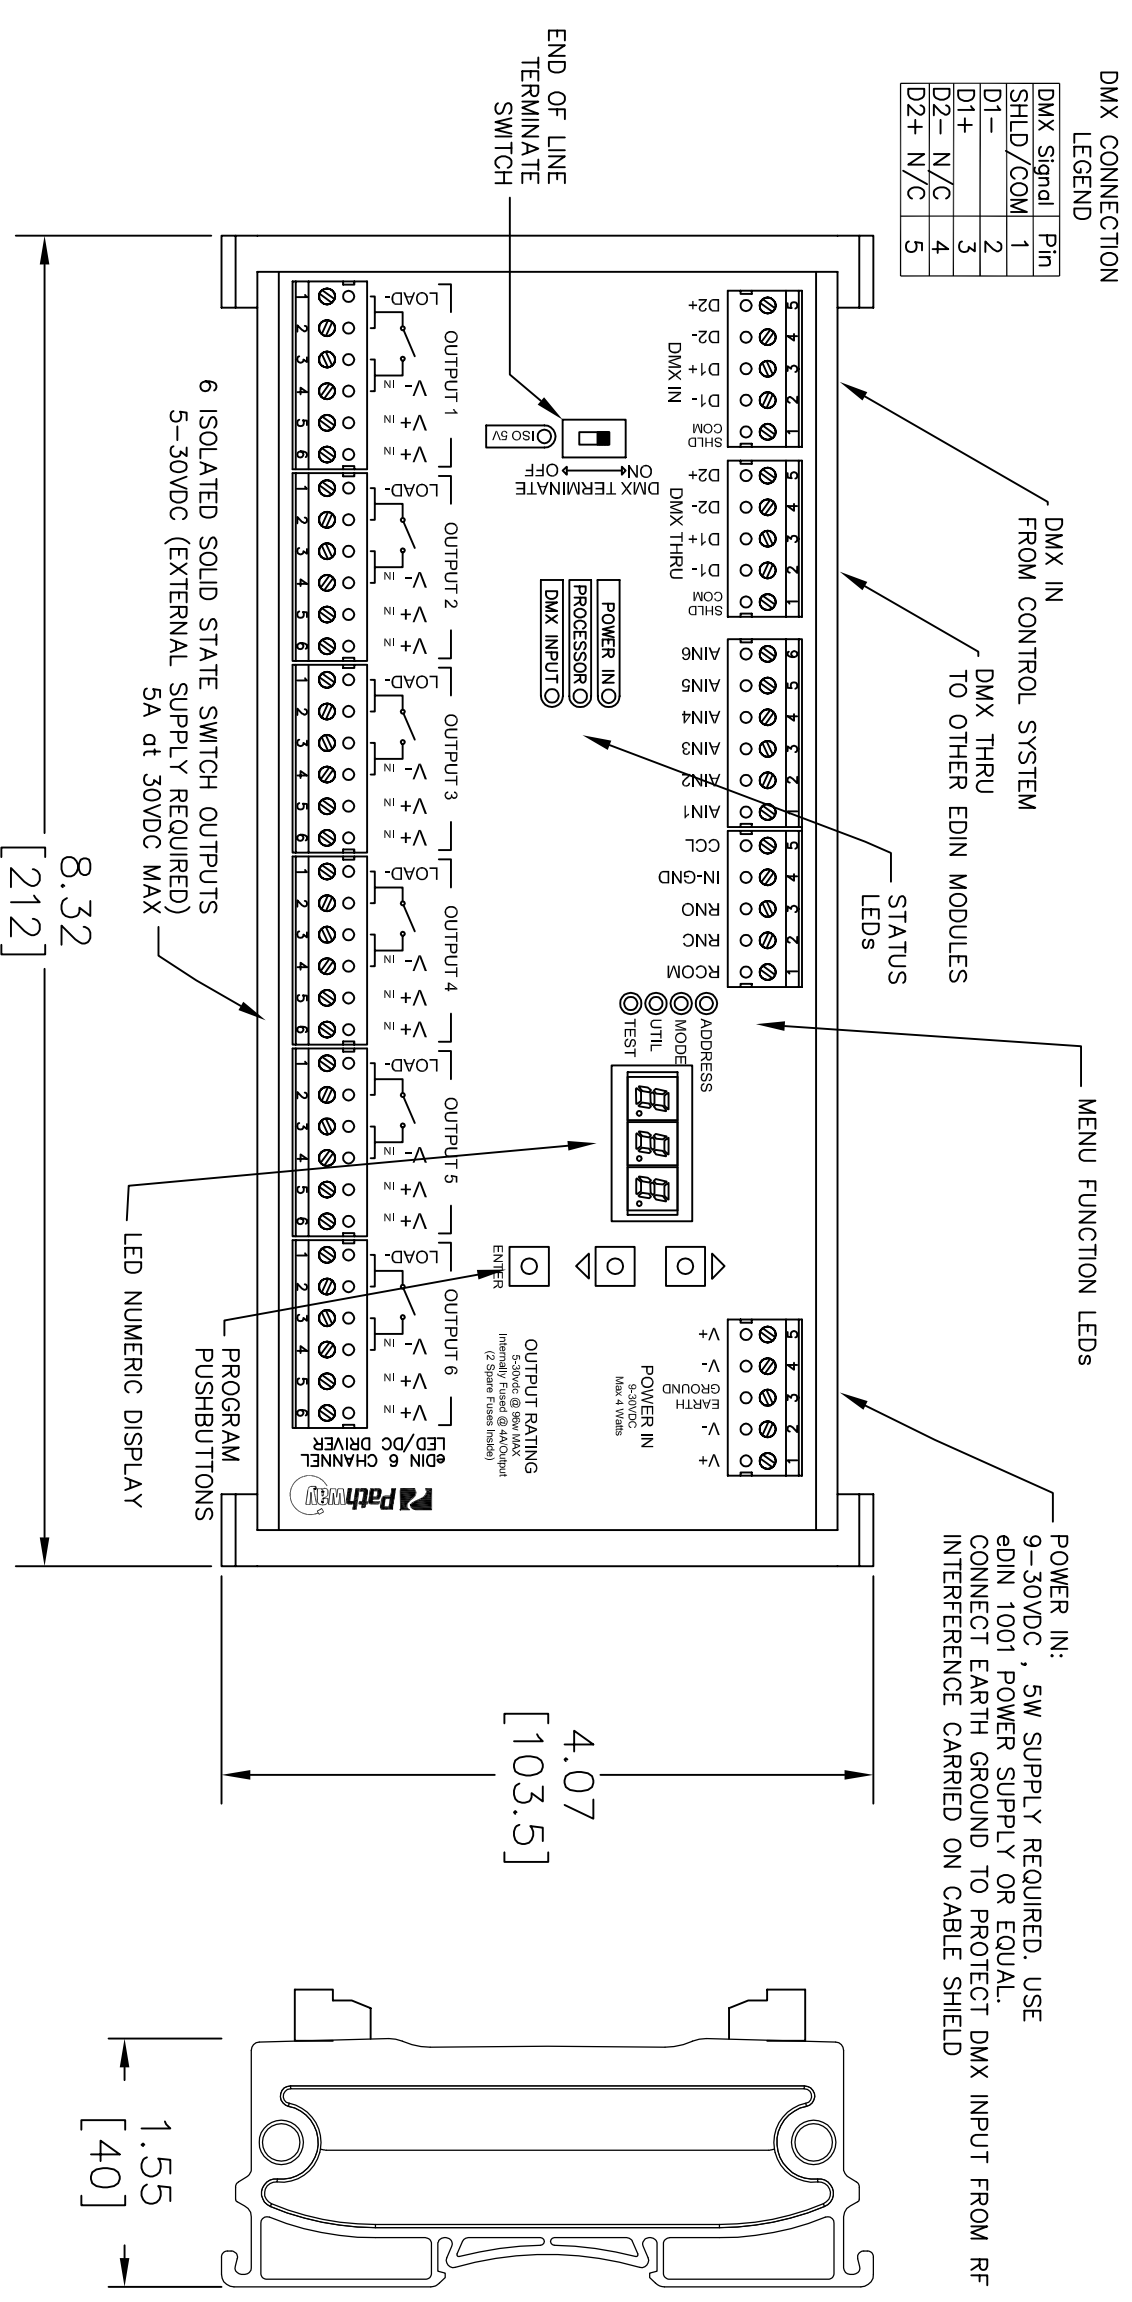

POWER IN:
9-30VDC, 5W SUPPLY REQUIRED. USE
eDIN 1001 POWER SUPPLY OR EQUAL.
CONNECT EARTH GROUND TO PROTECT DMX INPUT FROM RF
INTERFERENCE CARRIED ON CABLE SHIELD

Fastening mechanism designed
for 35 x 7.5mm DIN rail

1008 - eDIN 6 Channel LED Dimmer/DC Driver

FILENAME: 1008-eDIN-LED-DIMMER Rev2.dwg

PART NUMBER: 1008



Pathway Connectivity
103 Inglewood Plaza, 1439 17th Avenue SE
Calgary, Alberta, Canada T2G 1J9
Phone: +1(403)243-8110 Fax: +1(403)287-1281
<http://www.pathwayconnect.com>

DRAWN BY: BRIAN F. EVANS
DATE: 11/20/2015
CHECKED: ROBERT ARMSTRONG
SCALE: NTS
UNITS: INCHES [mm]

REV
B