

120/277 VAC Input (typical)

Manufacturer-approved LED Power Supply

24VDC Output (typical)


Example 1

Single color LED Fixture (typical) x 6 circuits per #1008
 Follow Manufacturer's specification for # of units, maximum distance and wire gauge


Three color (RGB) LED Fixture (typical) x 2 circuits per #1008
 Follow Manufacturer's specification for # of units, maximum distance and wire gauge

Example 2

eDIN #1008 LED Dimmer/DC Driver
 Maximum 4A at 24VDC per output

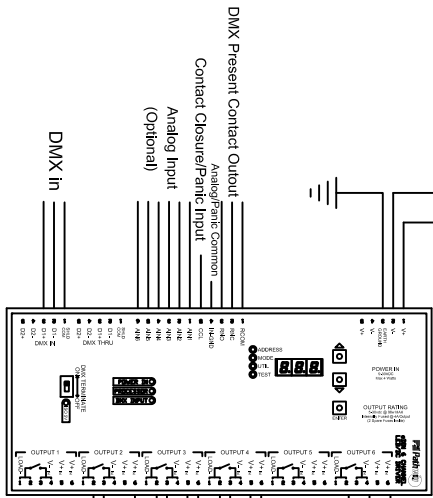

120/277 VAC Input (typical)



eDIN #1008 Control of LED Fixtures
 Typical Schematic For Single Color Shared PSU or Single RGB PSU

FILENAME: PART NUMBER: n/a



Pathway Connectivity
 #103 - 1439 17 Ave SE
 Calgary AB T2G 1J9
 P: +1 403 243 8110
 F: +1 403 287 1281
 www.pathwayconnect.com

DRAWN BY:	R Armstrong
DATE:	March 2014
CHECKED:	DAVID HIGGINS
SCALE:	NTS
UNITS:	INCHES

