

ETC ColorSource Relay



***“Our lighting setup is
so much easier!”***



Americas ■ Europe ■ Asia
www.etcconnect.com

ColorSource Relay



"Setup between events at the community center always went long because moving the light-stands around was an absolute mess."


Trouble setting up your portable lights? Does setup between events take too long? Fret no longer because....

ColorSource Relay makes setup a breeze!

The wireless ColorSource™ Relay and Transmitter work together effortlessly, providing your LEDs with wireless DMX and RDM, and enabling power switching for up to 16 amps of power. Simply connect the Transmitter to a wired-DMX source, set the ID dials on both units to the same number and you're ready to go! A single Transmitter can support up to 50 Relays within a 325-foot (100-meter) range. The Relay is also available in a hardwired version that can be daisy chained to a DMX system.

Each ColorSource Transmitter supports up to 32 connected RDM devices, providing remote configuration, system error monitoring and patching; it also allows you to change default switching modes, DMX addresses and delay time.

LED and automated fixtures continuously draw power even when they are not in use. The ColorSource Relay shuts off power to all connected fixtures when DMX signals are not present, dropping power draw to only one-quarter watt. This saves energy plus wear and tear on your equipment.

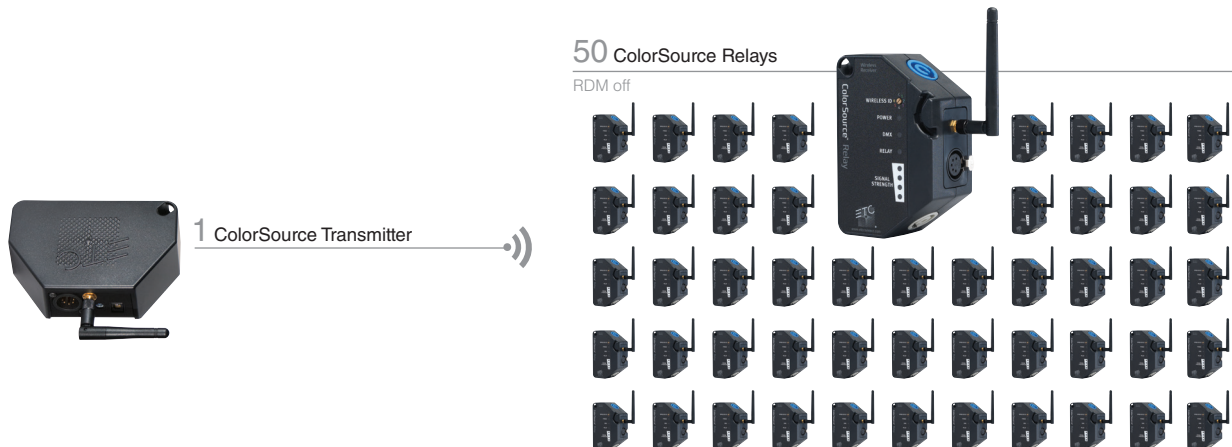

Connect with ColorSource family



Corporate Headquarters ■ 3031 Pleasant View Rd, PO Box 620979, Middleton WI 53562 0979 USA ■ Tel +1 608 831 4116

London, UK ■ Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK ■ Tel +44 (0) 20 8896 1000

Rome, IT ■ Via Pieve Torina, 48, 00156 Rome, Italy ■ Tel +39 (06) 32 111 683

Holzkirchen, DE ■ Ohmstrasse 3, 83607 Holzkirchen, Germany ■ Tel +49 (80 24) 47 00-0

Hong Kong ■ Room 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong ■ Tel +852 2799 1220

Web ■ www.etcconnect.com ■ Copyright©2016 ETC. All Rights Reserved. All product information and specifications subject to change. 4410L1001 Rev C 02/16