

Overview

Smart modules add additional functionality and connectivity to select CueServer 3 models by plugging them into an available module slot.

Use the **SM-RELAY4** module to interface to devices that require signal-level dry contact closures. These may include low voltage indicators, buzzers, projection screens, window covering motors, security systems, and more.

Each **SM-RELAY4** module adds four Form-C style signal level relays. Each relay can be opened or closed via software.

The **SM-RELAY4** is provided with a 12-position pluggable spring cage terminal block for easy field wiring. The terminals include the standard Form-C relay connections (Normally Open, Normally Closed, and Common) for each of the four signal relays.

Additionally, an LED indicator on the module provides at-a-glance operational status.


Features

- Provides 4 signal level Form-C relays
- Each relay is software controlled
- Relays have a 1A @ 30VDC current handling capacity
- Built-in status indicator LED

Ordering


SM-RELAY4 **Quad Relay Smart Module**
Includes 12-position pluggable terminal block

Warning: Do not connect voltages above 30V (such as line-level or mains voltage) to the **SM-RELAY4** module.

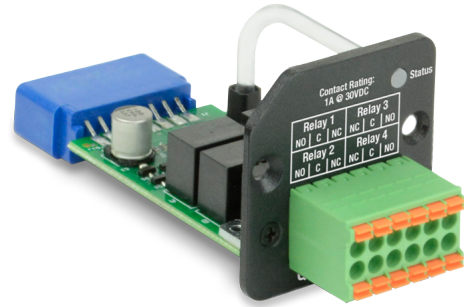


SM-RELAY4
Quad Relay Smart Module

Internal Relay Connections (x4)

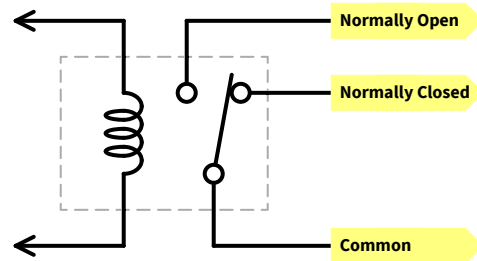

Typical Customer Wiring

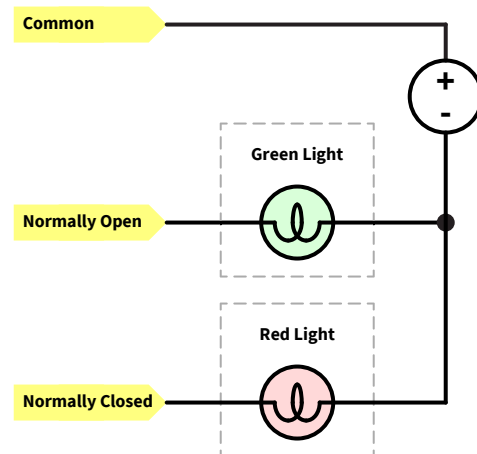

Specifications subject to change without notice. Interactive Technologies is not responsible for errors or omissions. All trademarks are the property of their respective owners. Copyright © 2022-23, Interactive Technologies, Inc. All rights reserved worldwide. D0536B 2/7/2023

Interactive Technologies, Inc.

5295 Lake Pointe Center Drive
Cumming, GA 30041 USA
1-678-455-9019
interactive-online.com

Catalog #:

Project:

Prepared by:

Date: