





MISCELLANEOUS TRACK HARDWARE

No. 451



No. 451A




NO. 451 REALLY USEFUL CARRIER

4 urethane-tired sealed ball bearing wheels are riveted to machined black aluminum body for use with No. 410S or 410A Track. Carrier is provided with two Nylatron bearings integral to body to keep unit centered in the track assembly. Carrier body is provided with a complement of mounting holes to enable attachment of scenery and various devices.

NO. 451A same as No. 451 plus third set of wheels to help prevent tipping of an unbalanced load.

Working Load Limit: 200#



NO. 6 PIVOT DEVICE

Heavy steel body U-bolts to pipe batten. Allows masking draperies to be rotated to any angle.

NO. 6B - black finish.


NO. 6X INDEXING PIVOT DEVICE

Pivot device with special plate to index rotation at 22-1/2 degree increments.

NO. 6XB - black finish.

All supplied with brackets for 1-3/8" O.D. pipe or tubing (6' max. recommended length).

Working Load Limit: 60 pounds.




SCENERY CARRIER WITH EYE

4 steel ball bearing wheels riveted to machined steel body. 3/8" forged eyebolt swivels in body and provides attachment point for scenery.

Working Load Limit: 150#

No. 139BS - for 110S track.

No. 439BS - for 410S track.




SCENERY CARRIER

4 steel ball bearing wheels riveted to machined steel body. 1/2" milled tap bolt provided for scenery attachment.

Working Load Limit: 150#

No. 140BS - for 110S track.

No. 440BS - for 410S track.




NO. 449 URETHANE

SCENERY CARRIER WITH EYE

4 urethane-tired sealed ball bearing wheels riveted to machined steel body for use with No. 410S or 410A track. Carrier provided with 2 Nylatron bearings to keep unit centered in the track assembly. 5/16" forged eyebolt swivels in body and provides attachment point for scenery.

Working Load Limit: 200#




NO. 450 URETHANE

SCENERY CARRIER

4 urethane-tired sealed ball bearing wheels riveted to machined steel body for use with No. 410S or 410A track. Carrier provided with 2 Nylatron bearings to keep unit centered in the track assembly. 1/2" milled pinned tap bolt is provided for scenery attachment.

Working Load Limit: 200#




NO. 450A URETHANE

SCENERY CARRIER

8 urethane-tired sealed ball bearing wheels riveted to machined steel body for use with No. 410S or 410A track. Carrier provided with 2 Nylatron bearings to keep unit centered in the track assembly. 3/8" bolt provided with 2 hex nuts and lock washer for scenery attachment.

Working Load Limit: 200#




PIPE CLAMP

Formed 12 gauge steel brackets clamp to 1-1/4" or 1-1/2" standard pipe for suspending curtain tracks parallel to pipe.

Working Load Limit: 150#

No. 435 - Zinc plated.

No. 435B - Black finish.




RIGHT ANGLE PIPE CLAMP

Formed 12 gauge steel bracket U-bolts to 1-1/2" standard pipe for suspending curtain track perpendicular to pipe.

No. 435R - Zinc plated.

No. 435RB - Black finish.




EXTENSION STRAP

12 gauge steel strap with holes 1.9" on center. Used to extend pipe clamp when attaching to upper member of standard 1-1/2" pipe grid.

No. 435X - Zinc plated.

No. 435XB - Black finish.



ROD SUSPENSION BRACKET

Formed 1/4" steel bracket with offset tab for suspending curtain track from 1/2" rod.

Working Load Limit: 150 pounds.

No. 448 - Zinc plated.

No. 448B - Black finish.



No. 442-2

CAST IRON SASH WEIGHT

2 pound smooth cast iron weight with eye.




NO. 447 SPLICE

1-9/16" X .120" steel tubing, 24" long, for use as internal sleeve for 1-1/2" Sch. 40 pipe batten. With 4 drilled holes and (4) 3/8-16 x 2-1/2" bolts and Nylock hex nuts.

NO. 447A SPLICE


Same as 447 Splice except no attachment holes. (4) 3/8-16 x 2-1/2" bolts and Nylock hex nuts provided.




NO. 643 SAND BAG TENSION PULLEY

6" Nylatron GS sheave with precision ball bearings in specially designed housing with heavy-duty sand bag. For maintaining proper operating line tension on flying curtains. Supplied without sand. Grooved for up to 1/2" operating line.


MISCELLANEOUS TRACK HARDWARE DIMENSIONS

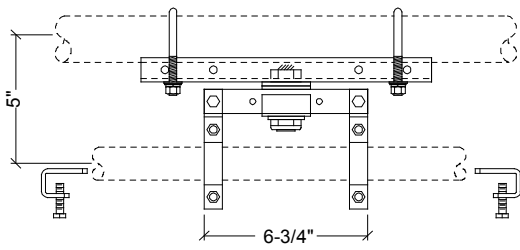



No. 6 Pivot Device




No. 451




No. 451A




REALLY USEFUL CARRIERS

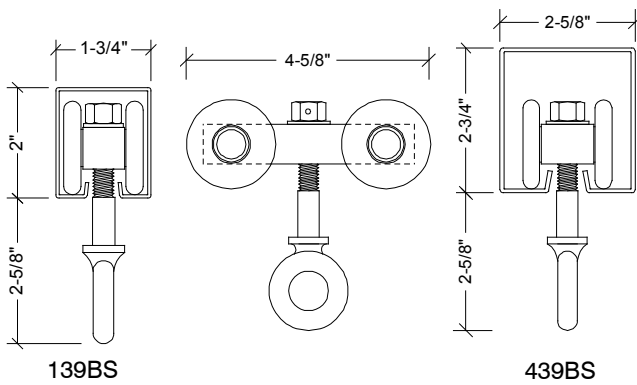


No. 139BS & 439BS Scenery Carrier

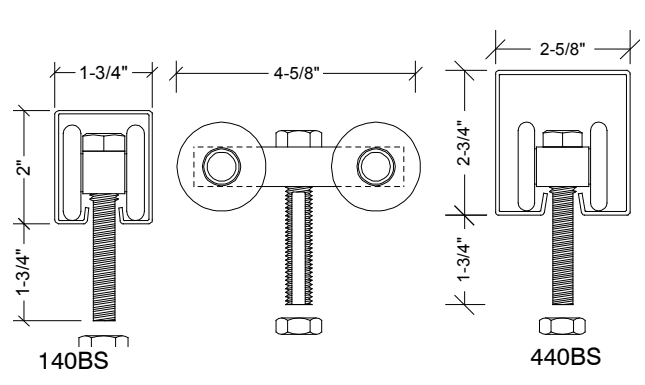



No. 140BS & 440BS Scenery Carrier






No. 449
Urethane Scenery Carrier




No. 450
Urethane Scenery Carrier



No. 450A
Urethane Scenery Carrier

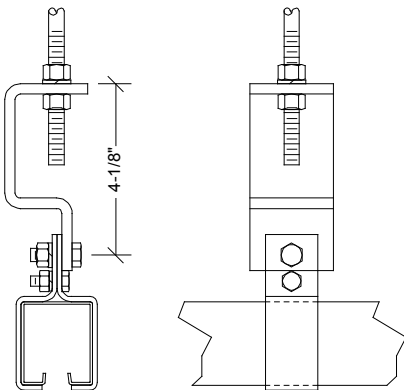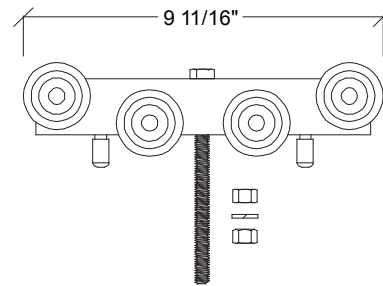


No. 448 Rod Suspension Hanger

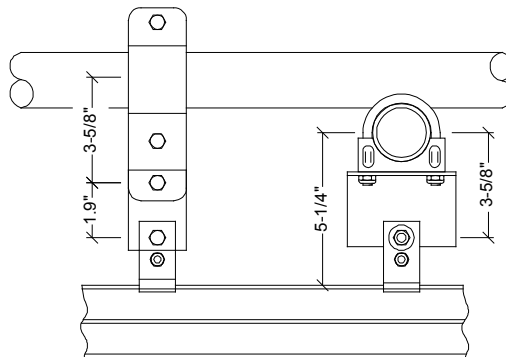

No. 435 Pipe Clamp
with No. 435X
Extension Strap

No. 435R
Pipe Clamp

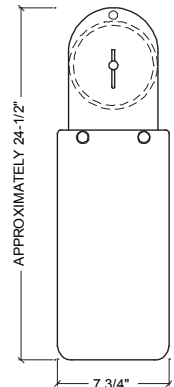

No. 643
Sand Bag
Tension Pulley