

# EN12

TECHNICAL DATA | REV A

OBSIDIAN™  
CONTROL SYSTEMS



## KEY FEATURES

- RDM, Artnet and sACN support
- Factory and user presets for plug and play setups
- Line Voltage or POE powered
- 1.8" OLED Display with rotary knob
- 99 Internal cues with fade and delay time
- Customizable routing and merging options
- Remote configuration via internal webpage
- Contact closures for cue or preset recall
- Powder-coated aluminum rackmount housing

## SPECIFICATIONS

### MOUNTING

Rackmount

### CONNECTIONS

#### Front

- Front
- (12) 5pin DMX/RDM optically isolated ports
- Ports are bidirectional for DMX In and Output
- Full color OLED display
- Encoder w. Push to Select / Exit Button

#### Back

- (2) Locking RJ45 Ethernet network connections (1x POE)
- (10) Contact Closures (Terminal Block)
- Locking Power In/Thru

### PHYSICAL

- Length: 482.5 mm (19 in.)
- Width: 146 mm (5.7 in.)
- Height: 44 mm (1.7 in.)
- Weight: 1.82 kg (4 lbs)

### ELECTRICAL

- 100-240 V nominal, 50/60 Hz
- POE 802.3af

### APPROVALS/RATINGS

cETLus / CE / IP20



# ORDERING


## INCLUDED ITEMS

1.5m Locking power cable (EU or US version)

SKU

US #: NRE001

EU #: 1330000066

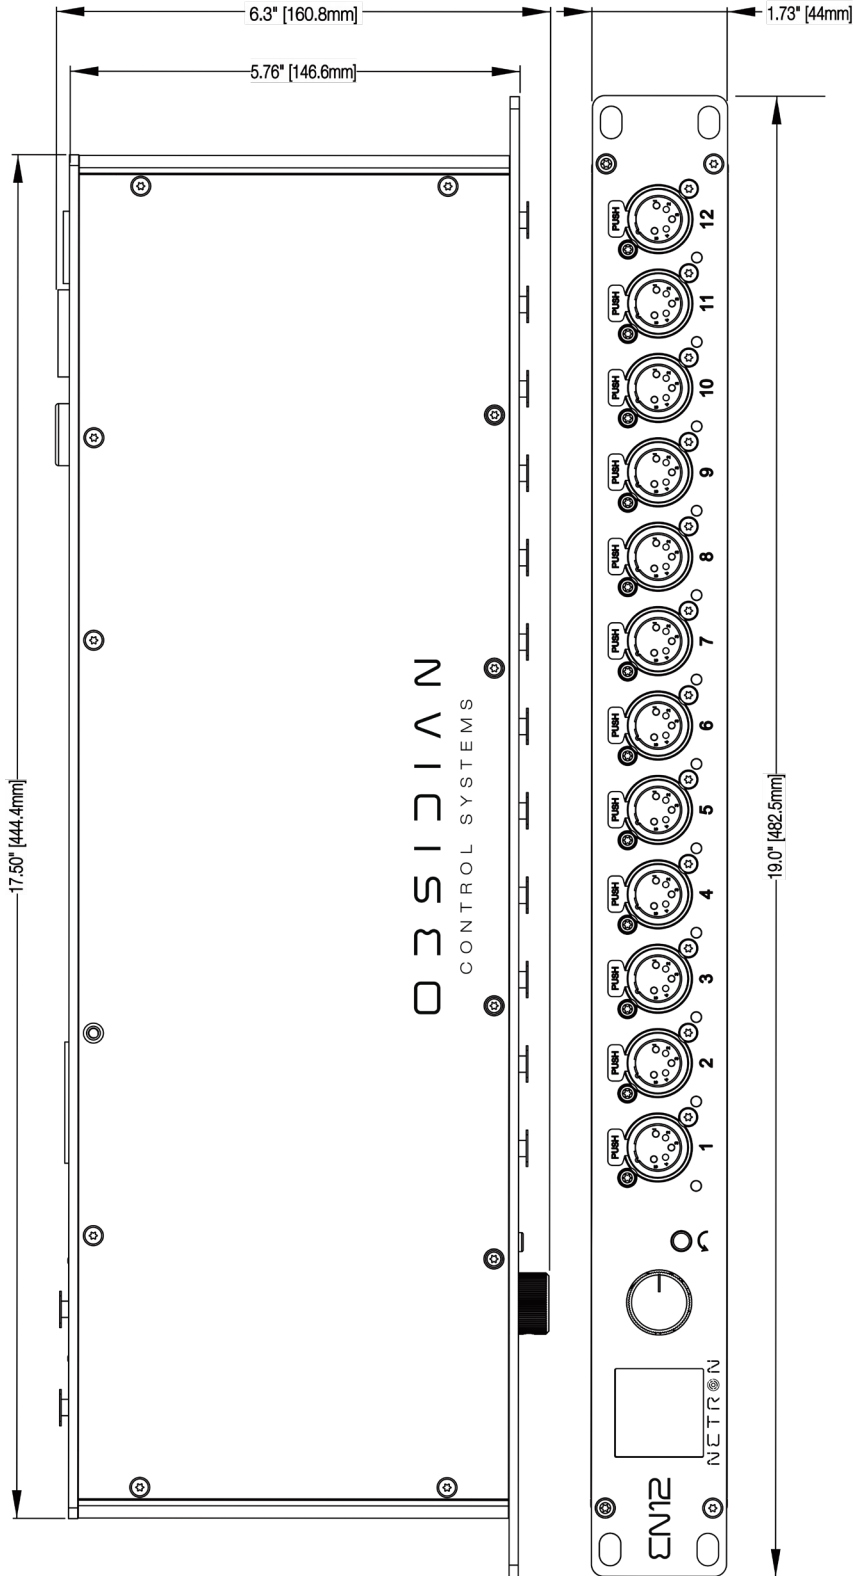

# EN12