



## GENERAL INFORMATION

A single Cobalt Motorized Fader Wing 20 or Cobalt Motorized Fader Wing 10 can be used as a playback surface for ETCnomad™ (either PC or Mac) or ETCnomad Puck™.

A single wing can also be used as a playback surface with Cobalt 20, Cobalt 10 or Congo Jr powered by Cobalt consoles, Remote Video Interfaces (RVI and RVI3) and the Cobalt or Congo Light Server. Connected devices must be running Microsoft® Windows® 7/8/8.1 or Mac OS X Yosemite. The Cobalt Motorized Fader Wing is not compatible with Congo or Congo Jr consoles or computers running Windows XP or earlier operating systems. The wing provides power sensing and automatically turns on when both an active USB data connection and mains power are provided via the external 12V power supply.

Note: Cobalt software supports up to 80 master playbacks in total. When using Motorized Fader Wings with Cobalt consoles, the number of wings that can be connected is determined by how many master playbacks are on the console itself (faders+backlit encoders). A Cobalt 20 has 40 master playbacks and can support wings up to an additional 40 playbacks. A Cobalt 10 has 20 master playbacks and can support an additional 60 playbacks.

## FEATURES

- Two versions
- Same Masters layout as Cobalt 20 and Cobalt 10
- Either 40 Master Playbacks consisting of 20 motorized master faders plus 20 backlit endless potentiometers and four full-color displays, or 20 Master Playbacks consisting of 10 motorized master faders plus 10 backlit endless potentiometers and two full-color displays
- Two Powered USB ports for connectivity
- VESA 100x100mm mountable
- Provides a Kensington Lock compatible locking point

## INTERFACES

- AC Input (100 - 240 VAC at 50/60Hz) with external power supply
- Two USB ports

## ORDERING INFORMATION

### Cobalt Motorized Fader Wings

MODEL	DESCRIPTION
Cobalt MFW 20	Cobalt Motorized Fader Wing 20
Cobalt MFW 10	Cobalt Motorized Fader Wing 10

### Cobalt Motorized Fader Wing Accessories


MODEL	DESCRIPTION
Net3 RFR	Radio Focus Remote
Net3 RFR-RX	Net3 Radio Focus Remote, Receiver only
Net3 RFR - TX	Net3 Radio Focus Remote, Transmitter only
Cobalt PGW FC	Cobalt Programming Wing Flight Case
Cobalt 2W FC	Cobalt Combined Wing Flight Case
Cobalt PGW	Cobalt Programming Wing
ETCnomad (256-6144)	ETCnomad (256-6144 Output Kit
ETCnomad Puck (256-2048)	ETCnomad Puck (256-2048 Output)

### Ships with

- Power supply
- IEC power cord
- Dust cover
- USB cable

### Cobalt Motorized Fader Wings are compatible with:

- ETCnomad for PC/Mac (requires ETCnomad Lighting Controller Kit and output device for real-time DMX output)
- ETCnomad Puck
- Cobalt 20 and Cobalt 10 consoles
- Congo Jr console, powered by Cobalt (Win7 only)
- RVI and RVI3
- Cobalt Light Server
- Congo Light Server (Win7 only)



PHYSICAL

**Cobalt Motorized Fader Wing Dimensions\***


MODEL	HEIGHT		WIDTH		DEPTH	
	inches	mm	inches	mm	inches	mm
Cobalt MFW 20	4.27	109	19.67	500	13.42	341
Cobalt MFW 10	4.27	109	12.22	310	13.42	341
Cobalt PGW with Flight Case	12.45	316	31.59	802	20.47	520

**Cobalt Motorized Fader Wing Weights\***


MODEL	WEIGHT		SHIPPING WEIGHT	
	lbs	kgs	lbs	kgs
Cobalt MFW 20	11.4	5.2	17.5	7.9
Cobalt MFW 10	6.2	2.8	12.5	5.7

\*Weights and dimensions typical

**COBALT MOTORIZED FADER WING 10**

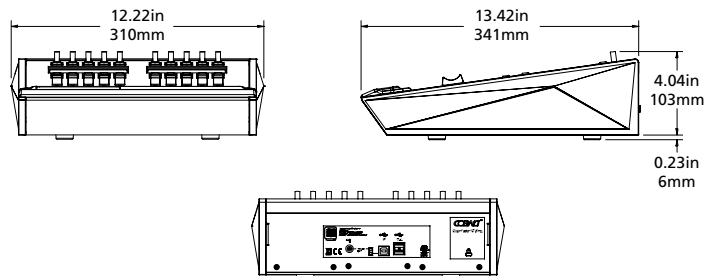

**COBALT MOTORIZED FADER WING 20**

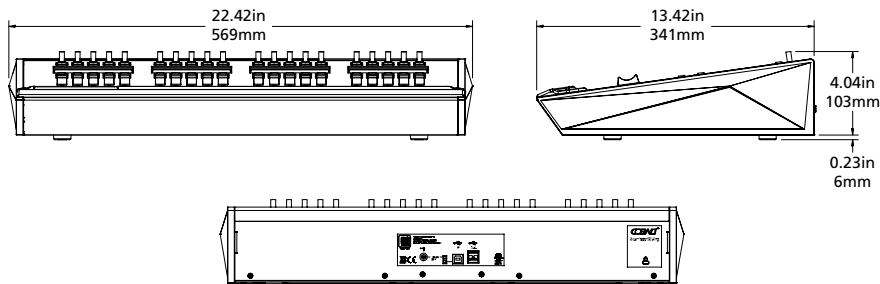

**Corporate Headquarters** • 3031 Pleasant View Rd, PO Box 620979, Middleton WI 53562 0979 USA • Tel +1 608 831 4116 • Fax +1 608 836 1736  
**London, UK** • Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK • Tel +44 (0) 20 8896 1000 • Fax +44 (0) 20 8896 2000  
**Rome, IT** • Via Pieve Torina, 48, 00156 Rome, Italy • Tel +39 (06) 32 111 683 • Fax +44 (0) 20 8752 8486  
**Holzkirchen, DE** • Ohmstrasse 3, 83607 Holzkirchen, Germany • Tel +49 (80 24) 47 00-0 • Fax +49 (80 24) 47 00-3 00  
**Hong Kong** • Room 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong • Tel +852 2799 1220 • Fax +852 2799 9325  
**Web** • www.etcconnect.com • Copyright©2016 ETC. All Rights Reserved. All product information and specifications subject to change. 4370L1051 Rev. B Printed in USA 10/16