


ETC® Install Guide



ES750 Dimmer Bracket and Connector Installation UL


Connector Options

The ES750 is a bare end dimmer for use with non-ETC, or preexisting fixtures. ETC recommends the following for field installation.

Recommended UL Input Connector for 120V Dimmer:

- 2 wire + ground: use NEMA L5-15, 5-15, L5-20, 5-20, or stage pin type connector.

ES750 Dimmer with bare end

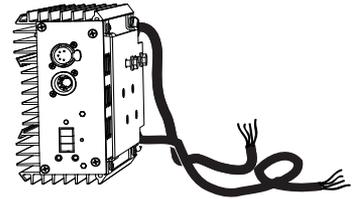

Connector Installation

- For connector installation, follow the manufacturer's instructions, making sure that the ground wire is landed correctly.



WARNING: Reference the blue label attached to the dimmer's output lead for important output information.

The ES750 Dimmer can ONLY be wired to fixtures with tungsten lamps. Wiring to any other lamp type will cause dimmer failure.

Bracket Options


There are two additional brackets that ship with the ES750 Dimmer. The sandwich bracket should be used when mounting the dimmer to the yoke of a fixture. The pipe mount bracket should be used with a C-clamp when mounting the dimmer to a lighting truss or pipe.

- A safety cable can be attached through either of the existing holes to the left and right of the mounting pad.

Sandwich Bracket

The Sandwich bracket includes a metal plate and needed hardware.

Step 1: Secure the fixture yoke between the two bracket plates with the four bolts provided.

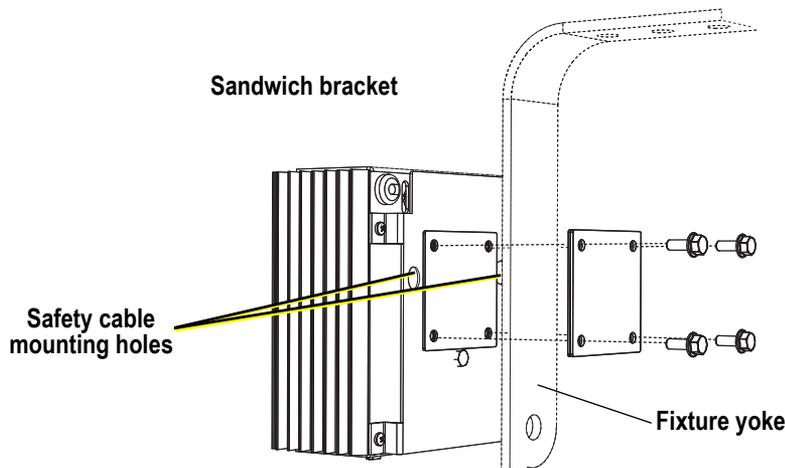

Corporate Headquarters ■ 3031 Pleasant View Road, P.O. Box 620979, Middleton, Wisconsin 53562-0979 USA ■ Tel +608 831 4116 ■ Fax +608 836 1736
London, UK ■ Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK ■ Tel +44 (0)20 8896 1000 ■ Fax +44 (0)20 8896 2000
Rome, IT ■ Via Pieve Torina, 48, 00156 Rome, Italy ■ Tel +39 (06) 32 111 683 ■ Fax +44 (0) 20 8752 8486
Holzkirchen, DE ■ Ohmstrasse 3, 83607 Holzkirchen, Germany ■ Tel +49 (80 24) 47 00-0 ■ Fax +49 (80 24) 47 00-3 00
Hong Kong ■ Rm 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong ■ Tel +852 2799 1220 ■ Fax +852 2799 9325
Service: (Americas) service@etconnect.com ■ (UK) service@etceurope.com ■ (DE) techserv-hoki@etconnect.com ■ (Asia) service@etcasia.com
Web: www.etconnect.com ■ Copyright © 2013 ETC. All Rights Reserved. ■ Product information and specifications subject to change.
© 7145M2120 ■ Rev B ■ Released 2013-01 ■ ETC intends this document to be provided in its entirety.

ETC Install Guide

Bracket and Connector Installation

Pipe Mount Bracket

The pipe mount bracket includes an L-shaped bracket and hardware.

- Step 1: Using two of the bolts provided, attach the bracket to the dimmer as in the graphic below.
- Step 2: Attach a C-clamp to the bracket



Note: *A C-clamp is not provided as part of the pipe mount bracket.*

Pipe mount bracket

