OBSIDIAN™
CONTROL SYSTEMS

The NETRON DMX10 is made from a rugged metal chassis featuring impact resistant paint and a lightweight yet solid construction. The DMX10 is ideally suited for installations and touring applications that do not require RDM communication and is available in 5 and 3pin XLR configurations.

KEY FEATURES
The DMX10 is a rackmount 10-port DMX Splitter with dual inputs and freely assignable XLR DMX outputs. Utilizing long life toggle switches every port is routed to either the A or B input, providing flexibility to accommodate any situation
- Dual A/B XLR DMX Input
- 10 isolated XLR DMX Outputs
- A/B routing per output port
- LED feedback for In/Out/A/B/Power
- Powder-coated rackmount housing

DMX10-5:
SPECIFICATIONS
CONNECTIONS

Front
- (2) 3pin DMX Input (A & B)
- (10) 3pin Opto-Isolated DMX Outputs (Toggle between A & B)

Back
- Locking Power In

PHYSICAL
- Length: 19.0" (482.0mm)
- Width: 6.1" (155.9mm)
- Height: 1.7" (44.0mm)
- Weight: 1.50 kg (3.31 lbs)

ELECTRICAL
- 100-240 V nominal, 47/63Hz, 0.14A
- 1A Fuse

Included Items
- 1.5m power cable (EU or US version)

Approvals / Ratings
- cETLus / CE / UKCA / IP20 (pending)

DMX10-3:
SPECIFICATIONS
CONNECTIONS

Front
- (2) 5pin DMX Input (A & B)
- (10) 5pin Opto-Isolated DMX Outputs (Toggle between A & B)

Back
- Locking Power In

PHYSICAL
- Length: 19.0" (482.0mm)
- Width: 6.1" (155.9mm)
- Height: 1.7" (44.0mm)
- Weight: 1.50 kg (3.31 lbs)

ELECTRICAL
- 100-240 V nominal, 47/63Hz, 0.14A
- 1A Fuse

Included Items
- 1.5m power cable (EU or US version)

Approvals / Ratings
- cETLus / CE / UKCA / IP20 (pending)

DMX10

ORDERING

INCLUDED ITEMS
1.5m Locking power cable (EU or US version)
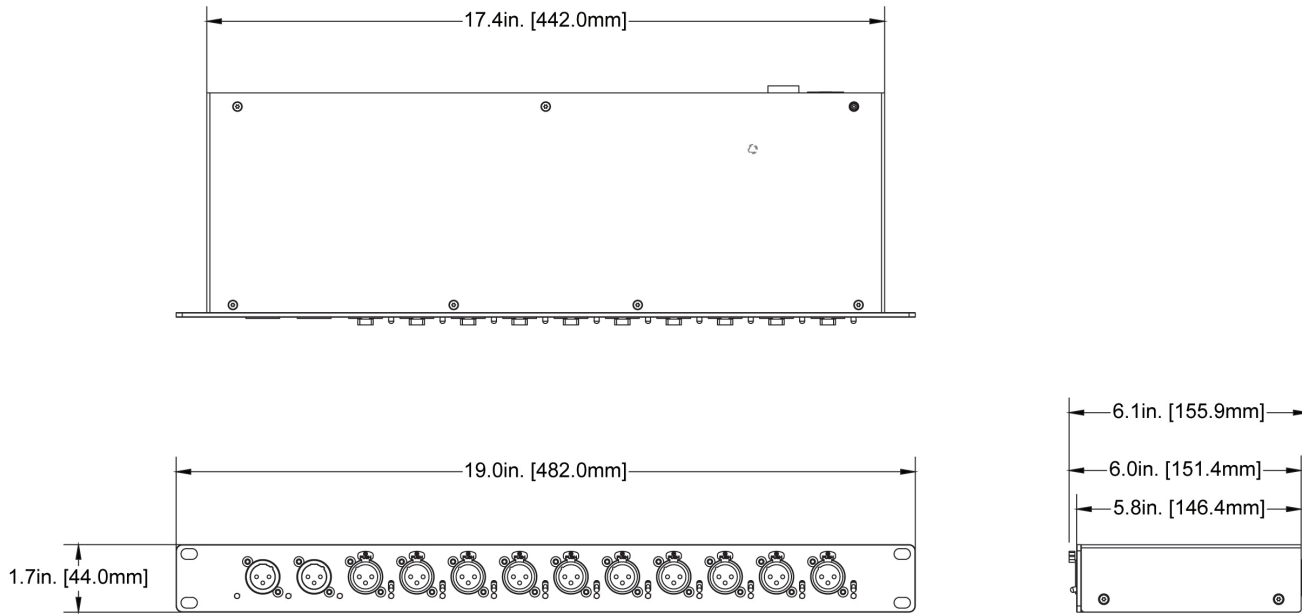(2) Wallmount plates
(2) DIN-Rail clamps

SKU
US #: NRE023
EU #: 1330000064

DMX10-3:

17.4in. [442.0mm]

19.0in. [482.0mm]

1.7in. [44.0mm]

6.1in. [155.9mm]
6.0in. [151.4mm]
5.8in. [146.4mm]

DMX10-5:

17.4in. [442.0mm]

19.0in. [482.0mm]

1.7in. [44.0mm]

6.1in. [155.9mm]
6.0in. [151.4mm]
5.8in. [146.7mm]